




Mini Booth



A single-person, acoustically controlled space for video calling in open offices. The Mini is designed to fit efficiently in and around the superstructure of the office space and take advantage of previously underutilised floor space. Our Mini comes with a modular electrical kit as standard that includes ventilation, lighting and power supply.

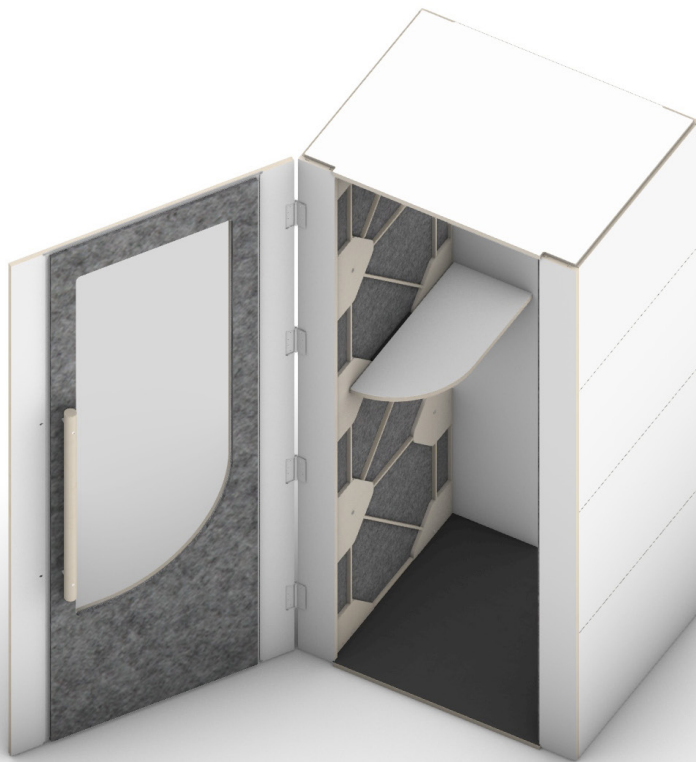

Compact footprint

The compact footprint of the Mini allows it to seamlessly integrate into busy office spaces.

Easy handling

The Mini can come in parts or pre-assembled into panels. Both panels and parts fit easily in a small elevator.

DIY

XFrame Mini Booths can be assembled with simple hand tools in office environments without disruption.

Exterior Options


Unfinished Black Stain White

Sample Lining Options

Interior Acoustic Options

Charcoal Neutral Grey + Custom

Included Parts

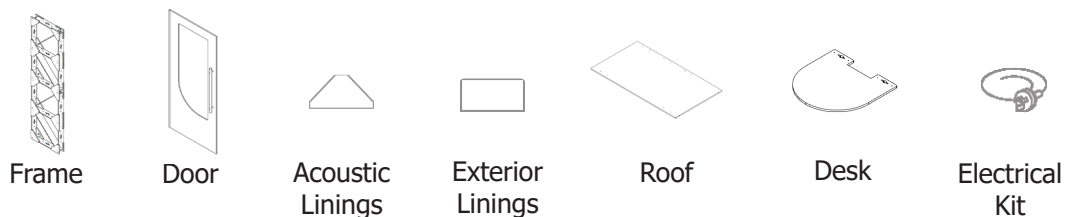

Technical Specifications

70kg

1.6 m³

FSC Birch or Pine


110° (Door Swing)

Mini Booth



Features Summary:

1. Customisable 12mm external linings fixed with durable reversible pressure clips.
2. Acoustically insulated CNC milled kit-of-parts modular framing panel (2x identical panels).
3. Integrated ply/plexi-glass door with signature curve detailing and internal acoustic lining.

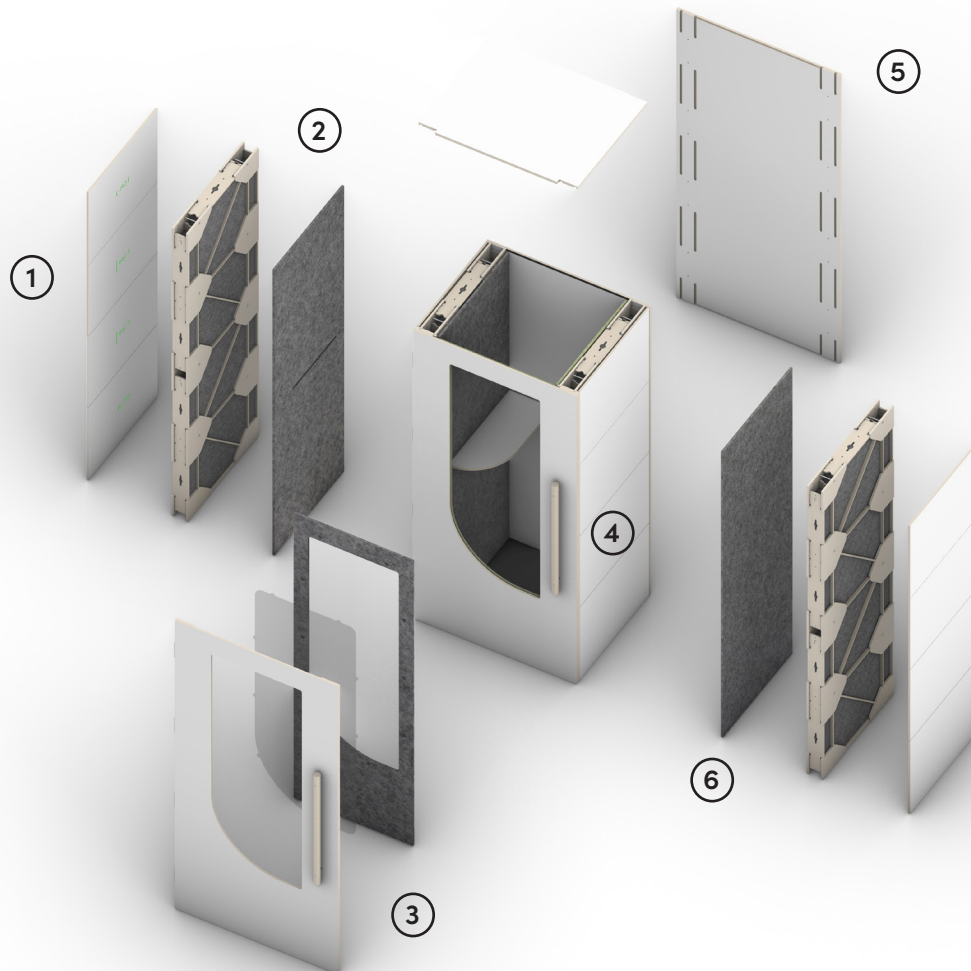


4. Solid American Oak, Ash or Victoria Ash door handle.
5. Solid 18mm (or 25mm) HPL plywood back panel (options for a glazed back).
6. 12mm recycled polyester acoustic panel internal finish either in-set or reversibly face fixed.



-30.76 kg


Total calculated carbon related emissions for XFrame Mini Booth.



Calculated carbon related emissions for XFrame plywood framing components:

-10.14 kg


Material: FSC Certified Australian grown 12mm and 9mm Hoop Pine.



Calculated carbon related emissions for XFrame lining components:

-31.05 kg


Material: FSC Certified Australian grown 18mm Hoop Pine with HPL finishes.



Calculated carbon related emissions for XFrame acoustic components:

0.00 kg (13.99 kg offset by manufacturer)

Material: 12mm Polyethylene Terephthalate (PET) Acoustic Panels with min. recycled content.



Calculated carbon related emissions for XFrame insulation components:

5.15 kg

Material: 50mm Polyethylene Terephthalate (PET) Insulation with min. recycled content.



Calculated carbon related emissions for XFrame hardware components.

5.28 kg

Calculated based off mild steel carbon emissions per metric tonne.

About this data:

XFrame calculates project carbon costs using volumetric data from an as-fabricated 3D digital model. Components are categorised by their respective material type and volumes summed for carbon calculation using localised environmental product declaration (EPD) data. When exact EPD data is unavailable XFrame uses the next regionally appropriate EPD information and applies an additional variance factor for this data source.

Carbon emissions reported refer to (BS) EN 15804 lifecycle stages A1-A3 only. Carbon emissions reported include both biogenic carbon (GWPB [kg CO₂-eq.]) and fossil carbon (GWPF [kg CO₂-eq.]) data sources. For further information pertaining to lifecycle stages A4-C4 contact XFrame or visit xframe.com.au/carbon.