

Two Person Booth


Powered by XFrame



Two Person Booth



Powered by XFrame – this two-person meeting space is unique for its attractive price-point and endless customisation option. Supplied as standard with dual USB-C charging and quad fan ventilation.

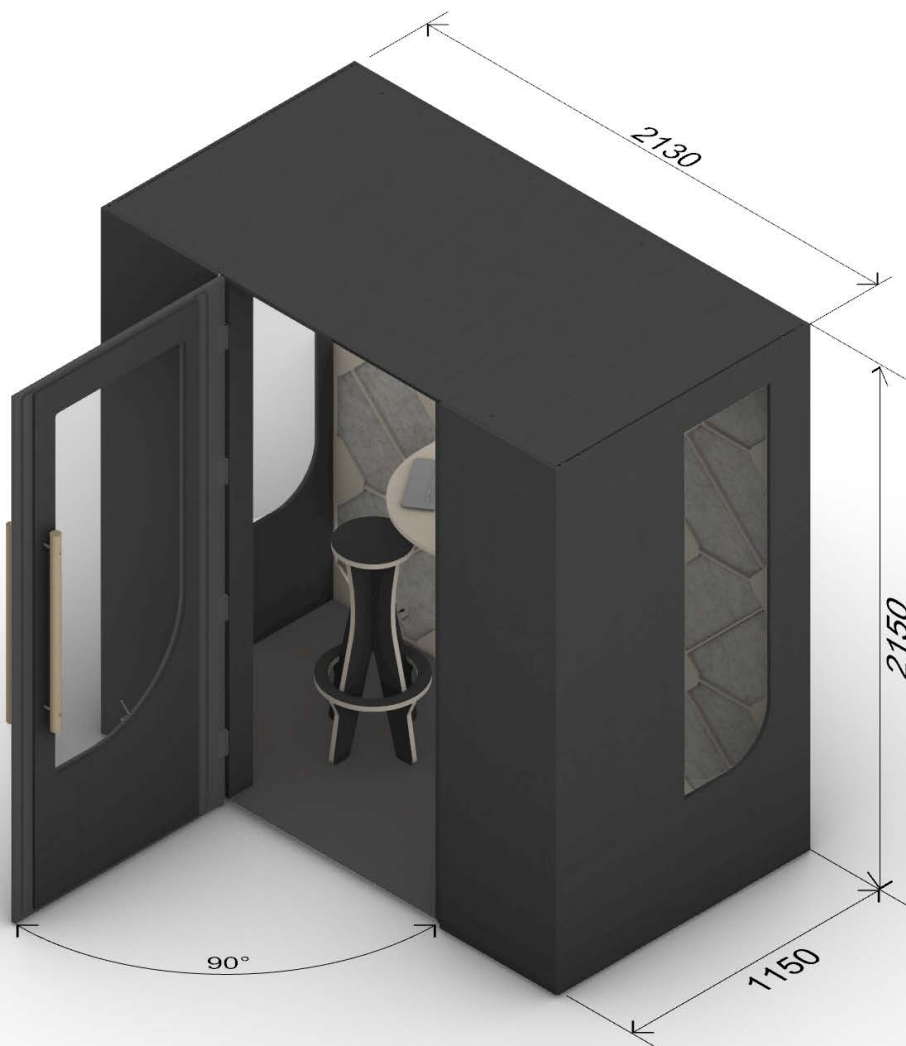

Lining Options	Exterior Options	Custom	Black HPL	White HPL
	Interior Acoustic Options	Custom	Neutral	Grey


Custom Linings: Choose from any 12mm Autex (or EchoPanel) colourway. Lead-times may vary.

Inclusions

End plexi-glass windows, HPL door with plexi-glass cut-out, HPL floor, 12mm recycled PET rear wall, end wall, ceiling and from wall linings. 2x Wall Mounted Spot Lights, 1x double GPO with USB charging. 4x 70mm 240v fans (100% positive pressure).


Specifications	290kg (gross weight)	4.4 m ³	E0 FSC Hoop Pine Frame	20 ACH Ventilation
-----------------------	----------------------	--------------------	------------------------	--------------------

Two Person Booth

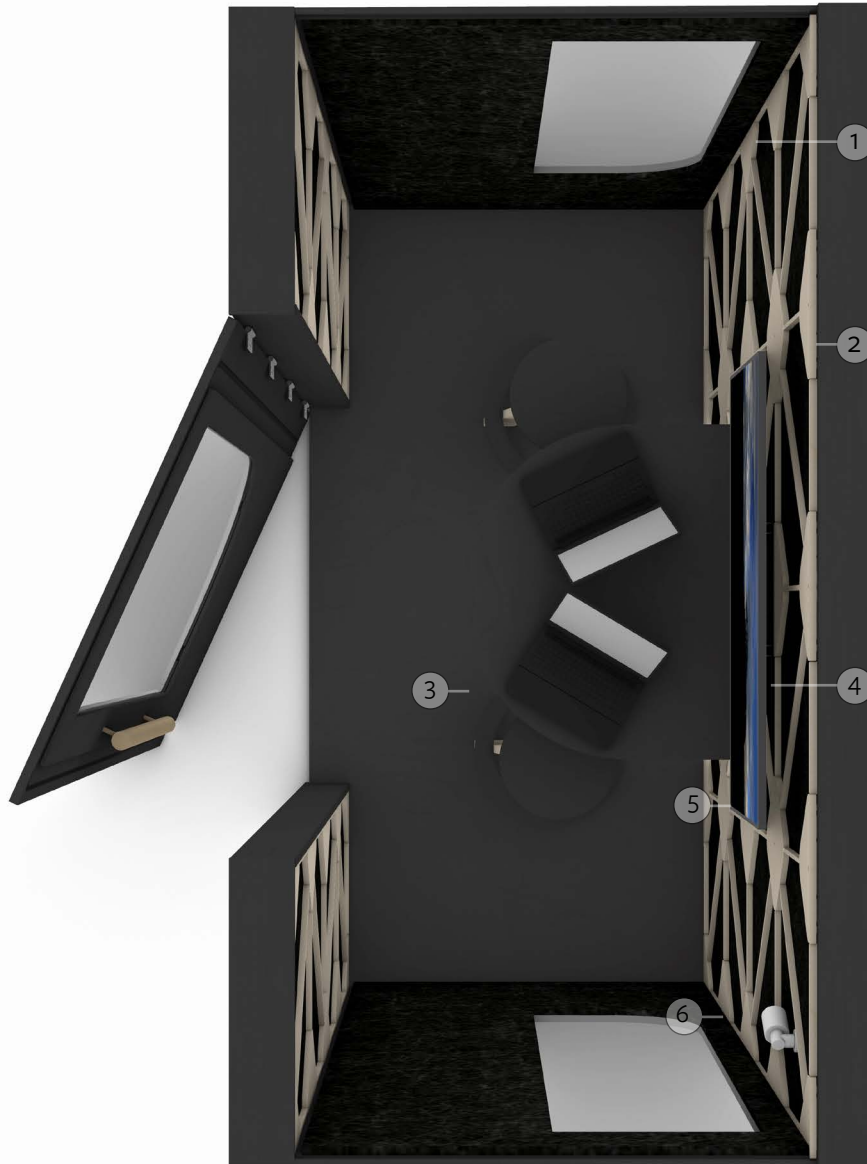


Product Features

1. Windows located in the door and both ends of the booth to allow an abundance of natural light & visibility.
2. Two motion sensor lights located at either ends of the booth.
3. Desk for collaborative work. W 760 x H 650
4. Option to mount a 32 inch TV on rear wall.
5. 1x double GPO located above desk.
6. Intergrated quiet fan's located at either ends of the booth to ensure airflow.



-83.45 kg


Total calculated carbon related emissions for XFrame Double Booth.



Calculated carbon related emissions for XFrame plywood framing components:

-18.38 kg


Material: FSC Certified Australian grown 12mm and 9mm Hoop Pine.

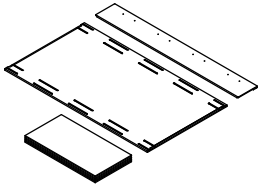

Calculated carbon related emissions for XFrame lining components:

-82.92 kg

Material: FSC Certified Australian grown 18mm Hoop Pine with HPL finishes.




Calculated carbon related emissions for XFrame acoustic components:

0.00 kg

 (35.96 kg offset by manufacturer)

Material: 12mm Polyethylene Terephthalate (PET) Acoustic Panels with min. recycled content.



Calculated carbon related emissions for XFrame insulation components:

11.78 kg

Material: 50mm Polyethylene Terephthalate (PET) Insulation with min. recycled content.



Calculated carbon related emissions for XFrame hardware components.

6.07 kg

Calculated based off mild steel carbon emissions per metric tonne.

About this data:

XFrame calculates project carbon costs using volumetric data from an as-fabricated 3D digital model. Components are categorised by their respective material type and volumes summed for carbon calculation using localised environmental product declaration (EPD) data. When exact EPD data is unavailable XFrame uses the next regionally appropriate EPD information and applies an additional variance factor for this data source.

Carbon emissions reported refer to (BS) EN 15804 lifecycle stages A1-A3 only. Carbon emissions reported include both biogenic carbon (GWPB [kg CO₂-eq.]) and fossil carbon (GWP [kg CO₂-eq.]) data sources. For further information pertaining to lifecycle stages A4-C4 contact XFrame or visit xframe.com.au/carbon.